



AromaOne™ Air Freshener Dispenser Instructions

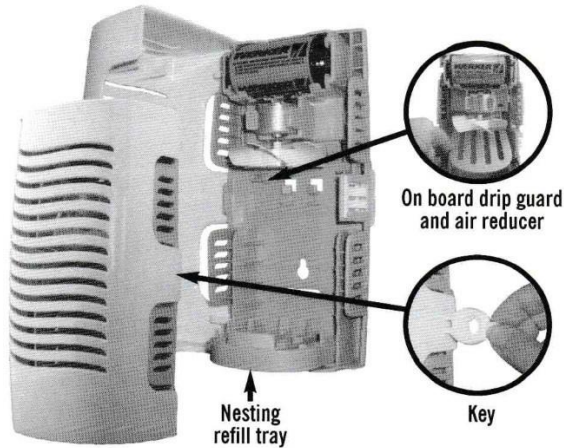

- Use provided key to open dispenser cover as shown above.
- Nesting refill tray includes drip guard and air reducer.
- Choose a location, typically, in rooms with 8' ceilings, mount dispenser 5"–6" from ceiling. For higher ceilings, mount dispensers approximately 7 1/2' from the floor (measured to top of dispenser).

SPECIAL SLIDE-N-LOCK HIDDEN SCREW MOUNTING FEATURE

- **FIGURE 1.** Remove fan blades by pulling fan blades straight down.
- **FIGURE 2.** Removal of fan blades exposes BATTERY UNIT RELEASE TABS under battery unit.
- Push on BATTERY UNIT RELEASE TABS while pulling down on battery unit releasing battery unit.
- **FIGURE 3.** Removal of BATTERY UNIT exposes HIDDEN SCREW MOUNTING.

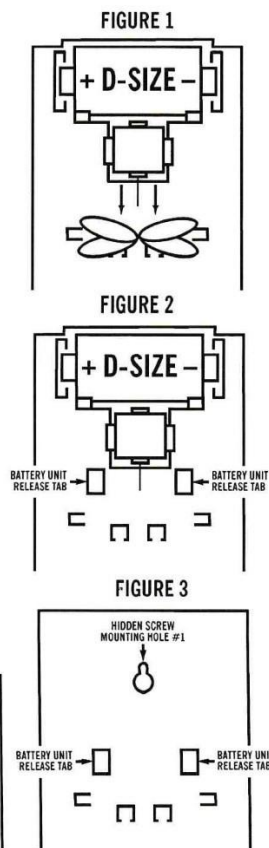


TO REPLACE BATTERY ASSEMBLY
Position top of assembly below locking rails. Firmly push upwards into **locking** position.

MOUNTING DISPENSERS TO THE WALL


- Avoid mounting Air-Scent® AromaOne™ Freshener Dispenser above urinals to resist vandalism; also avoid mounting units above doors.
- Position dispenser on wall in desired location. Being sure dispenser is plumb and level, mark wall through holes in dispenser with pencil. Note: Use uppermost hole and leveling slot.
- Drill 3/16", 15/64" or 1/4" holes into wall at your marks (Hole size is determined by type of wall anchor; see template on reverse side).
- Slide battery assembly downward to expose hidden screw mounting hole described in **FIGURES 1, 2 & 3.**
- Insert #6x1 countersunk mounting screw into hidden screw mounting hole #1 of backplate assembly. Level backplate and mark hole #2. Insert anchor into wall and screw backplate into anchor until tight.
- Replace battery assembly to original position.

BATTERY SERVICE INSTRUCTIONS

- One QUALITY GENERAL PURPOSE Carbon-zinc battery is required for 30 days performance. (Do not allow battery to remain over 32 days.)
- One HEAVY DUTY carbon-zinc battery ensures 30 days performance and may last up to 45 days. (Do not allow battery to remain over 60 days.)
- One ALKALINE battery should last 60 days. Always dispose of old batteries properly. Note: As battery ages the fragrance intensity reduces drastically.

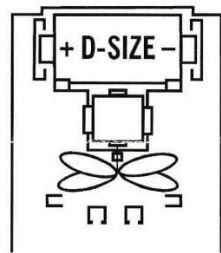

AROMAONE SMART VERSION ONLY

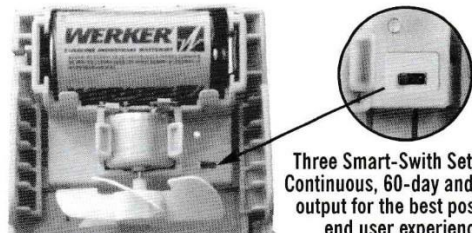


Three Smart-Switch Settings:
Continuous, 60-day and linear output for the best possible end user experience

- 1) Continuous Fan Operations
Setting 1-Fan runs full time
- 2) 60 Day Refill Setting
Setting 2-Fan runs 1 minute on, 1 minute off
- 3) Phases for Consistence Performance
Setting 3-Days 1-7 Fan runs 1 minute, stops 3 minutes
Days 8-14 Fan runs 1 minute, stops 2 minutes
Days 15-21 Fan runs 1 minute, stops 1 minute
Days 22-30 Fan runs continuously

Always dispose of old batteries properly.

MOUNTING TEMPLATE FOR AROMAONE AIR FRESHENER DISPENSER

Recommended Screw Style:
1-1/4" counter-sink screw
Phillips or
flathead screw.

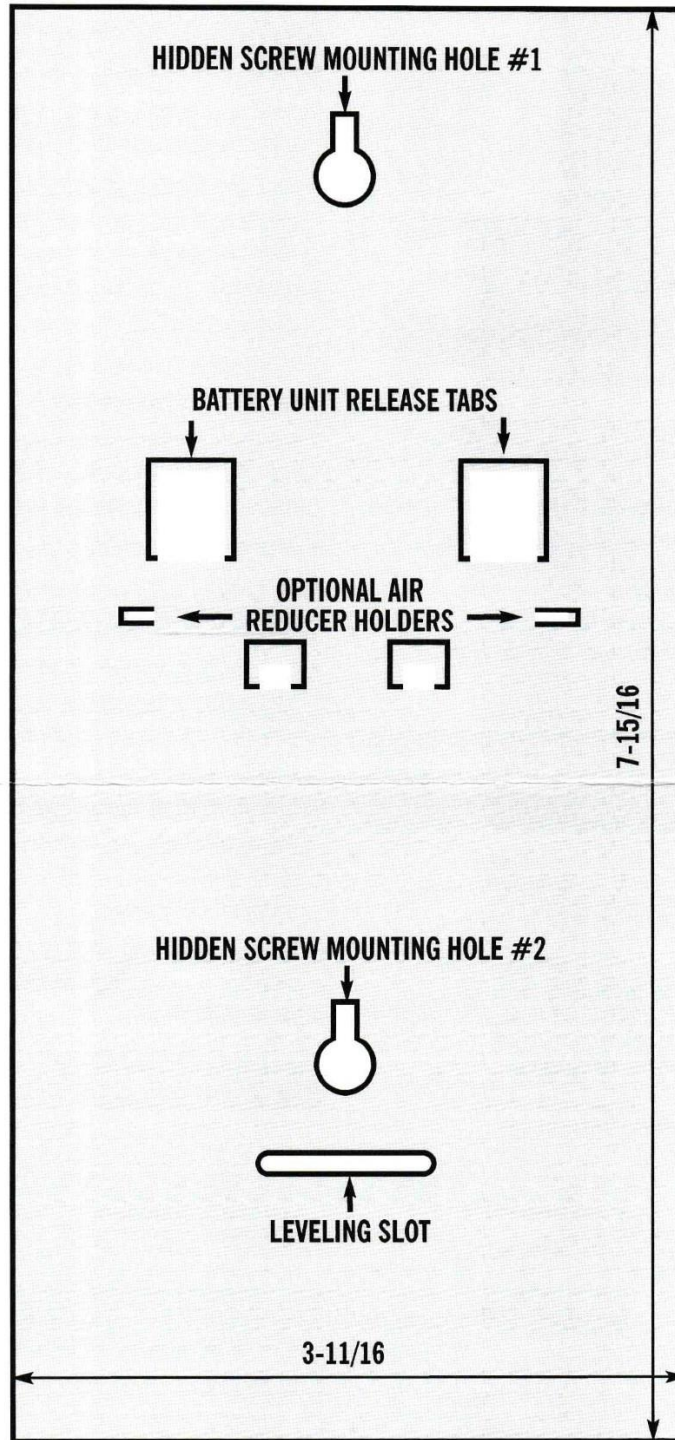

- SOLID WALLS (Concrete, Block, Brick, Tile)**
 With carbide bit, carefully drill two $\frac{3}{16}$ " holes approximately one inch deep and insert plastic (pencil tip) anchors (#8-10) into holes. Install dispenser to wall with (#8-1") screws provided.*
- PANELED WALLS (Wood)**
 Locate stud and use scratchawl to mark holes and install dispenser to wall with screws provided (use molly or toggle bolts if unable to locate stud).*

- METAL PANELS**
 Use scratch-awl to mark two holes, drill two holes into metal panel and install to panel with screws provided.*
- HOLLOW WALLS (Dry Wall, Plaster)**
 Drill two holes to accommodate the molly or toggle bolts (insert first) and install dispenser to wall.



 6658-5868

 213-1152